



Benefit from our experience to increase your success!

When it comes to manufacturing or processing foodstuffs and beverages, having the right valve in the right place is essential if things are to run smoothly. The requirements are always high: Reliable functionality, good cleanability, no dead space and exact control quality are just a few examples.

With Schubert & Salzer valves, you can be sure you have made the right choice. We have many years of experience as the trusted partners of a broad range of successful companies working in the food and beverage industry and our valves are used for a wide variety of applications. Our valves are used in production plants for beverages and dairy products, for instance. They also regulate the steam, hot water, refrigerants, CIP cleaning media or gases which are required for the temperature control, sterilisation, autoclaving, carbonation or pasteurization of different products. They are also

often used in fermentation, smoking, cleaning and drying processes, as well as for the provision of fresh water or the treatment of waste water.

Whatever the challenges in your process might be, you can rely on Schubert & Salzer to be a competent partner at your side. We do not just sell you an off-the-shelf product; we offer professional support and a valve solution which is designed to fit your individual requirements.

**Benefit from our experience
to increase your success!**



Sliding Gate Control Valve



The GS-Valve and its applications – See the movie at:
controlsyste.ms.schubert-salzer.com/en/gs-film

Media such as steam, hot or cooling water are used in heating, cooling, sterilising, autoclaving or pasteurising processes. Sliding gate valves are ideal when it comes to regulating these media. They are also used for process gases such as air, CO₂ or liquid nitrogen. Likewise with very high or very low temperatures, high pressure or when fast cycle times, high control precision or a high rangeability is required. Users appreciate the significantly reduced energy consumption, facilitated through the small actuator and the very short valve stroke of just 6-9 mm.

Principle of the sliding gate control valve:


A sealing plate (2) fixed in the body (1) at right angles to the flow direction has a certain number of crossways slots (3) of equal height. A rotationally fixed disc (4) with the same arrangement of slots is moved at right angles to this, thereby changing the flow cross section. The prevailing differential pressure presses the moving disc (4) against the fixed disc (2) and seals it.



Summary of your benefits:

- Compact construction and simple installation.
- 10 times less actuation force reduces energy consumption and is kinder for the climate and environment.
- Highest control performance and response sensitivity thanks to the smart positioner; fast reaction times due to the short stroke.
- Very simple servicing by exchanging the easily accessible disc pair.
- Minimal spare parts requirements.
- Minimised wear and tear in cavitation applications due to optimised flow guidance.
- Compact, integrated positioner with no permanent consumption of control air.
- It is easy to optimise or adjust the regulation as the C_{vs} values can be altered simply by exchanging the fixed disc.
- Short strokes reduce wear and tear and extend the life of the part.
- Maintenance-friendly replacement of the integrated positioner. Smart diagnostics software in the positioner as a valuable aid.
- Low heat or cooling loss due to a reduced body surface.
- Reduced noise emissions.
- As a compact control valve with positioner 8049 optionally with analogue input, IO-Link, Ex and FM approval.

Size comparison between a normal seat valve and a Schubert & Salzer sliding gate valve. In the example, the nominal size of both is identical.

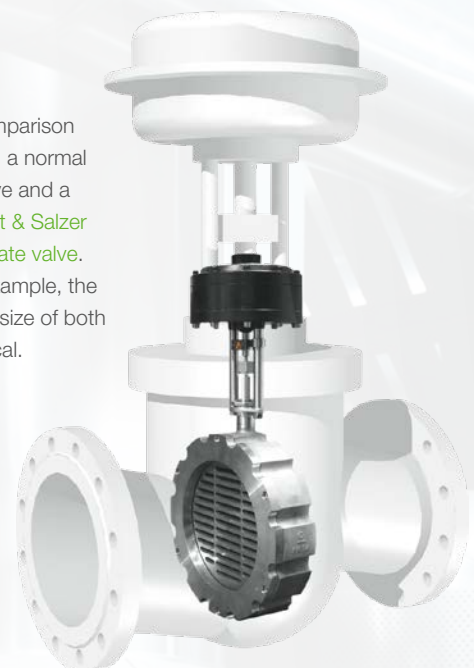

Seat Valves

Seat valves are used when liquid and gaseous media have to be shut off or precisely controlled safely and without hydraulic shock.

Summary of your benefits:

- All-rounder with a long service life, switching frequencies of over 1 million and high tightness even with slightly contaminated media.
- As a compact control valve with positioner 8049 optionally with analogue input, IO-Link, Ex and FM approval.
- Complete design in stainless steel possible, incl. all actuator components.
- All wetted parts are FDA compliant and meet the requirements of EC regulation 1935/2004 and EU plastic regulation 10/2011.
- Temperature range of -100°C to 220°C.
- Dead space-free design possible.
- Hygienic valves type 7015 and 7025 optionally with $Ra < 0.8 \mu m$.
- Space-saving construction with welded ends ensure no leaking at the valve connections.
- Flexible pilot air connection thanks to an actuator bonnet which can rotate 360°.
- Very simple to maintain: body remains in the pipeline when replacing wearing parts such as valve actuators or seat seals.
- Modular design: identical valve body for line strainers, check valves, manual valves, on/off and control valves.



The **hygienic angle seat valves type 7015 and 7025** have been designed without dead space. The batch numbers of all wetted stainless steel parts are traceable. The wetted plastics are FDA-compliant and conform to the EC Regulation 1935/2004 as well as the EU Plastic Regulation 10/2011.



The modular system of Schubert & Salzer seat valves enables numerous actuator variations and designs. The angle seat, straight seat, flanged, right angle and 3/2-way designs can be used for e.g. strainers, check valves, manual valves, pneumatic stop valves, pneumatic control valves or valves with motorised actuators.

Aseptic & Hygienic Right Angle Valves

The EHEDG-certified aseptic right angle valve 6051 and the 3A-compliant hygienic right angle valve 6052, optionally with integrated positioners, are specialists in sterile processes. Particularly maintenance-friendly, easy to clean and trimmed for rangeability and control accuracy, the 6051 and 6052 are suitable for shutting off and controlling liquids and gases where it comes down to the highest purity.

Summary of your benefits:

- The self-draining CIP and SIP-compatible bodies are made out of 1.4435 stainless steel. Surface roughness of up to $Ra < 0.4 \mu m$.
- The interior and exterior, cavity-free seal is facilitated through a highly efficient membrane.
- All wetted plastics are FDA compliant and meet the requirements of USP Class VI, of EC regulation 1935/2004 and EU plastic regulation 10/2011.
- Suitable for medium temperatures from $-20^{\circ}C$ to $140^{\circ}C$.
- Highest control performance is achieved thanks to a rangeability of 50:1.

Aseptic & Hygienic Right Angle Valves Type 6051 & 6052:



- Fast and easy maintenance among others due to the clamp connection between actuator and body.
- Available in a complete stainless steel version (including actuator and positioner).
- As a compact control valve with positioner 8049 optionally with analogue input, IO-Link, Ex and FM approval.

Pinch Valves

Using Schubert & Salzer pinch valves, sterile media but also solid-bearing, paste-like and abrasive liquids can be reliably shut off and controlled.



Summary of your benefits:

- The cutting-edge stainless steel body design with straight tube passage ensures maximum C_{VS} values.
- Highly compact construction with 360° rotating piston actuator.
- All wetted parts are made of stainless steel, elastomer or polymers.
- FDA-compliant for hygienic applications.
- Fibre reinforced tubes ensure a long service life.
- Quick exchange of tubing (wear and tear part) through the axial removal of the valve body.
- Possible connections: inner threads, welding ends, tri-clamp or bonded socket joints.
- As a compact control valve with positioner 8049 optionally with analogue input, IO-Link, Ex and FM approval.

Germany

**Schubert & Salzer
Control Systems GmbH**

Bunsenstraße 38

85053 Ingolstadt

Germany

Phone: +49 / 841 / 96 54-0

Fax: +49 / 841 / 96 54-5 90

info.cs@schubert-salzer.com

Benelux

**Schubert & Salzer
Benelux BV/SRL**

Poortakkerstraat 91/201
9051 Gent

Belgium

Phone Belgium: +32 / 9 / 334 54 62

Fax Belgium: +32 / 9 / 334 54 63

info.benelux@schubert-salzer.com

Phone Netherlands: +31 / 85 / 888 05 72

info.nl@schubert-salzer.com

Phone Luxembourg: +352 / 20 / 880 643

info.lux@schubert-salzer.com

France

**Schubert & Salzer
France SARL**

950 route des Colles
CS 30505

06410 Sophia Antipolis

France

Phone: +33 / 422 84 01 74

info.fr@schubert-salzer.com

United Kingdom

**Schubert & Salzer
UK Limited**

140 New Road

Aston Fields

Bromsgrove

Worcestershire

B60 2LE

United Kingdom

Phone: +44 / 19 52 / 46 20 21

Fax: +44 / 19 52 / 46 32 75

info@schubert-salzer.co.uk

India

**Schubert & Salzer
India Private Limited**

707, Lodha Supremus,
Senapati Bapat Marg, Upper Worli,

Opp. Lodha World Tower

Lower Parel (W)

Mumbai 400 013

India

Phone: +91 / 77 38 15 46 61

info.india@schubert-salzer.com

**United States of America
Schubert & Salzer Inc.**

4601 Corporate Drive NW
Suite 100

Concord, N.C. 28027

United States of America

Phone: +1 / 704 / 789 - 0169

Fax: +1 / 704 / 792 - 9783

info@schubertsalzerinc.com

www.schubertsalzerinc.com

