


## Supplementary module for digital positioner Type 8049-2 wire from version V7

- Feed back 4-20 mA
- 2 limit signal transmitters


- Feedback on current valve position
- Feedback signal does not require calibration
- Feedback by 2 conductors
- 2 limit signal transmitters according Namur (EN 60947-5-6)
- Limit signal transmitters freely adjustable (0-100%) with software „DeviceConfig“
- Easy to retrofit

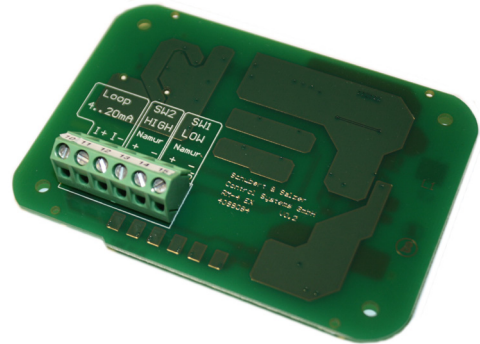

### Technical Information

Output signal	4 - 20 mA
Internal load	< 8V (400 Ω)
Temperature range	-10 ... +75°C
Accuracy Feedback	± 1,5%
Limit signal transmitters	2 pieces (NAMUR)
Switching range	adjustable 0-100%
Switching hysteresis	ca. 2,5%

### Electrical connection

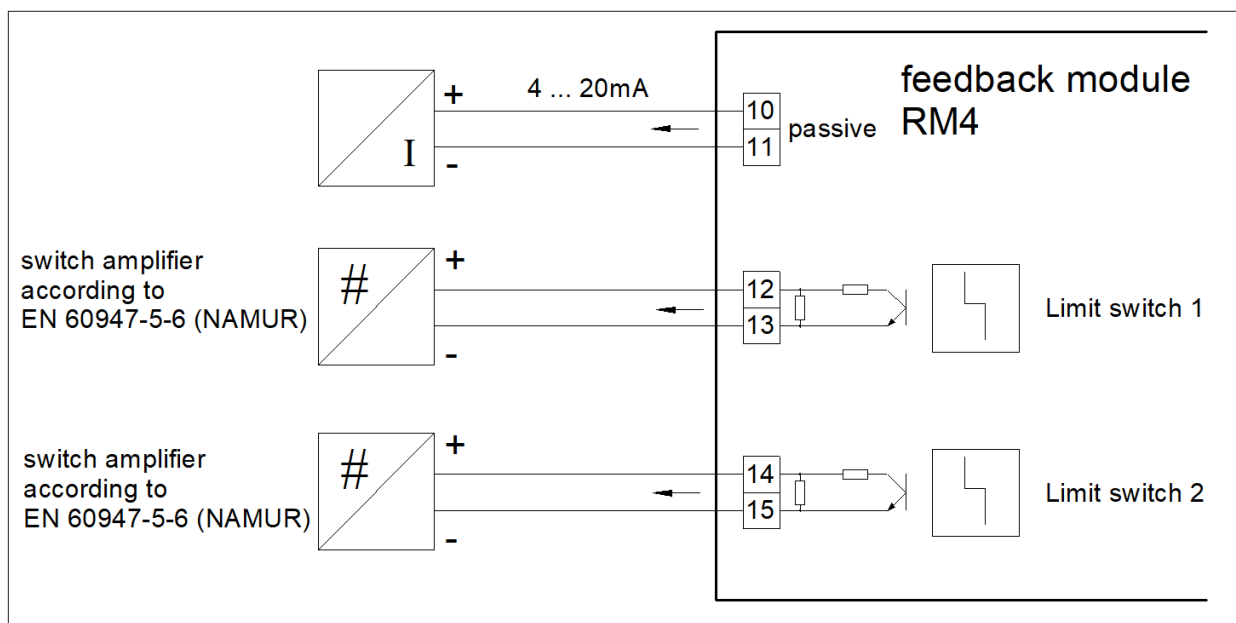

Text and pictures are not binding. We reserve the right, to alter the equipment.